



DLS *♫* Effects, Inc

DLS *Ultra ChorusII*[™] hookup information:


- 1) **Mono In -Mono Out** hookup: Instrument to “Input A”, use either “OutA” or “OutB” to amplifier. (**See Note 1 below concerning grounding)

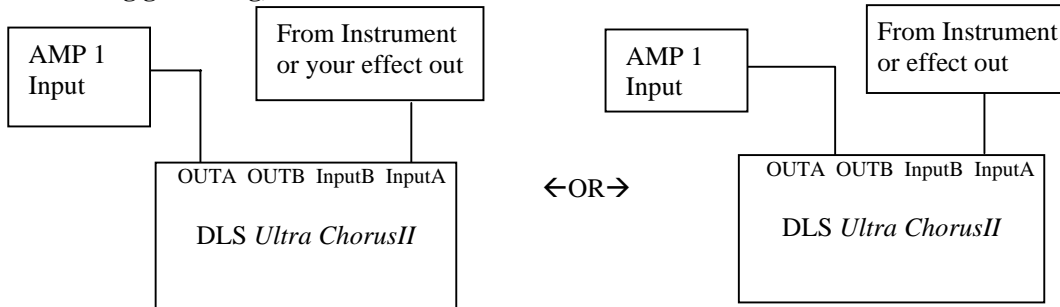

- 2) **Mono in - Stereo Out** hookup: Connect Instrument to “Input A”, connect “OutA” to amplifier #1 and “OutB” to amplifier #2. **Note:** When On/Off is switched “Off”, INA is connected to both OUTA and OUTB. All Input and Output grounds are common (connected). (**See Note 1 below concerning grounding)

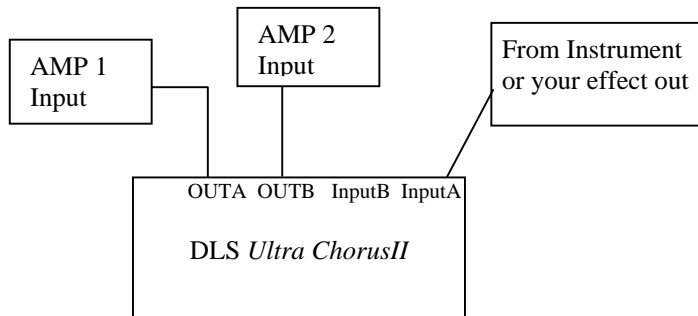

- 3) **Stereo In - Stereo Out:** Connect 1st input to “Input A”, connect “Out A” to amplifier #1, Connect 2nd input to “Input B” and “OutB” to amplifier #2. When On/Off is switched “Off”, INA is connected to OUTA, and INB is connected to OUTB. **Note:** all Input and Output grounds are common (connected). (**See Note 1 below concerning grounding).

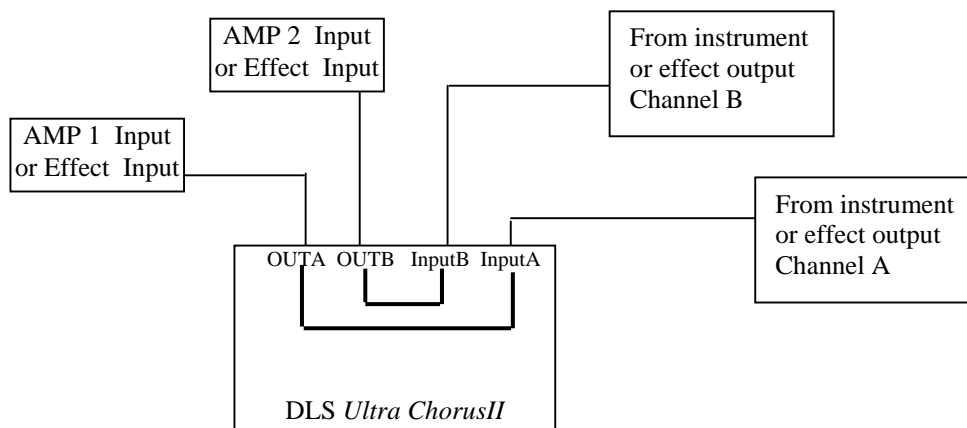

- 4) **Power for *Ultra ChorusII*:** Input + 9vdc to 13.8vdc, 130ma minimum, any polarity 2.1mm jack. A 9vdc pedal board supply may be used provided it can supply a minimum 9vdc at a minimum of 130ma, the plug polarity does not matter. A 115vac, 60hz input to 9vdc output wall plug in transformer is included. (**See Note 1 below concerning grounding)

****Note 1: Warning; proper grounding and electrical hookup are required when hooking up any electrical products. In-correct grounding can cause injury or even death. If in doubt concerning grounding or electrical hookup, consult with a qualified electrician or qualified dealer.**